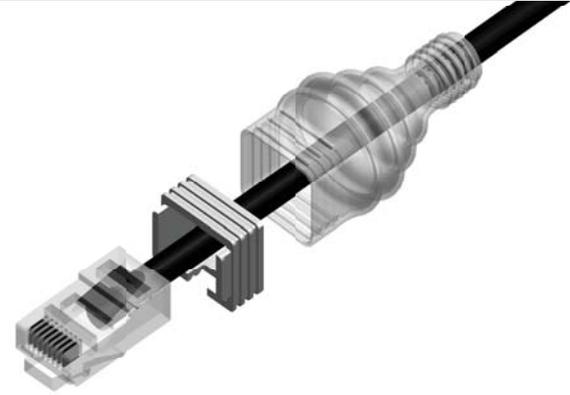Seal kit for climate sensors and other Agrowtek products with white sheet metal enclosure. Keep dust and moisture from entering the enclosure or cable connection throgh the connector opening.

A silicone boot installs over the RJ-45 connector and seals snuggly against the cable. A plastic boot adapter connects the boot firmly to the sheet metal enclosure securing it in place.

A separate rubber hole plug is included to plug the un-used DC power jack hole for additional protection.

Kit works on all existing models. Boot must be installed on cable before RJ-45 crimp termination.

Installed on SXC Climate Sensor

Features

 Durable Silicone Boot

 Port Adapter Made in USA

 1-Year Warranty

Installation Instructions

1. Install the DC power jack cover by pressing the black port cover into the hole until it snaps into place.
2. Install the gray plastic port adapter ring into the RJ-45 connector hole.
3. Slide the CAT5 cable through the boot. Use a damp cloth to lubricate the cable jacket if necessary.
4. Crimp and test the RJ-45 cable connector (ensure cable is disconnected at both ends to prevent damage.)
5. Plug the RJ-45 connector into the jack through the port adapter.
6. Slide the boot toward the connector then stretch the boot and seat it around the port adapter.

PORT ADAPTER

BOOT

NOTCH

DC JACK COVER